


Models 2410S(SS) / 2415S(SS) Formed Steel Stationary Louver

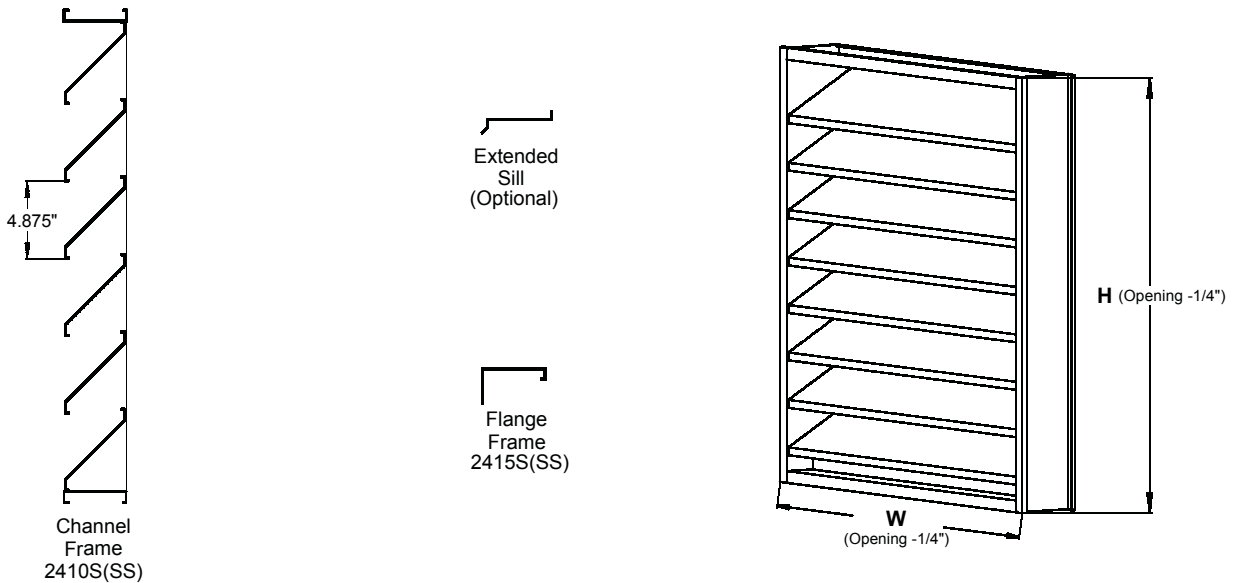

Quantity	Ref. #	Width (W) Opening Size*	Height (H) Opening Size*	Frame	Options/Accessories
PROJECT:					ENGINEER:
CONTRACTOR:					SUBMITTAL DATE:

STANDARD CONSTRUCTION

Depth:	4" (102 mm)
Material:	Galvanized Steel
Frame Thickness:	18 ga.
Blade Thickness:	18 ga.
Blade Angle:	45 degrees
Blade Centres:	4 7/8"
Bird Screen:	1/2" x 1/2" galvanized, 19 ga.
Minimum Size:	12" x 12" (305 x 305 mm)
Maximum Panel Width:	60" (1524 mm)
Maximum Panel Height:	120" (3048 mm)
Standard Finish:	Mill Finish
Free Area 48" x 48":	7.38 sq. ft. (0.686 m2)

OPTIONS/ACCESSORIES

Stainless Steel Construction: Type 304
Type 316

Bird Screen: 1" x 1" Galvanized
1/2" X 1/2" Stainless Steel

Insect Screen: 18 x 14 Mesh

Finish: Powder Coat Paint
Paint Colour # _____

Accessories: Blank-Off Panel
1" or 2" Insulated Blank Off Panel
Hinged Frame
Assembled with Stainless Steel Fasteners
Hinged Frame and Louvered Access Door
Security Bars
Extended Sills
Extended Sleeves
Filter Racks

** Louver will be manufactured 1/4" smaller than given opening dimensions unless otherwise specified.*