
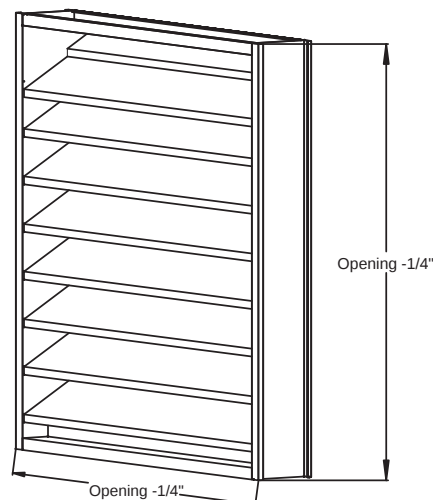




Models 2420S(SS) / 2425S(SS) 4" Formed Steel Stationary Louver

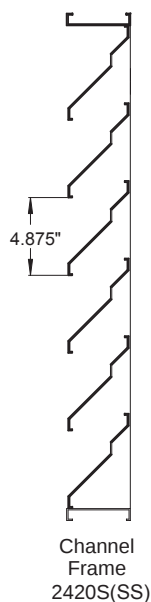

Quantity	Ref. #	Width (W) Opening Size*	Height (H) Opening Size*	Frame	Options/Accessories
PROJECT NAME:				ENGINEER:	
CONTRACTOR:				SUBMITTAL DATE:	

STANDARD CONSTRUCTION

Depth: 4" (102 mm)
 Material: Galvanized Steel
 Frame Thickness: 18 ga.
 Blade Thickness: 18 ga.
 Blade Angle: 45 degrees
 Blade Centres: 4.875"
 Bird Screen: 1/2" x 1/2" Galvanized, 19 ga.
 Minimum Size: 12" x 12" (305 x 305 mm)
 Maximum Panel Width: 60" (1524 mm)
 Maximum Panel Height: 120" (3048 mm)
 Standard Finish: Mill Finish
 Free Area 48" x 48": 7.29 sq. ft. (0.677 sq. m)

OPTIONS/ACCESSORIES

Stainless Steel Construction: Type 304
 Type 316

Bird Screen: 1" x 1" Galvanized
 1/2" x 1/2" Stainless Steel

Insect Screen: 18 x 14 Mesh

Finish: Powder Coat Paint
 Paint Colour # _____

Accessories: Blank Off Panel
 1" or 2" Insulated Blank Off Panel
 Hinged Frame
 Assembled with Stainless Steel Fasteners
 Hinged Frame and Louvered Access Door
 Security Bars
 Extended Sills
 Extended Sleeves
 Filter Racks

*Louver will be manufactured 1/4" smaller than given opening dimensions unless otherwise specified.