


| ITEM            | STS-75   | STS-75SS   | STS-100                                   | STS-100SS  | OTHER NOTES   |
|-----------------|--|--|---|--|---|
| JACKSHAFT       | Ø 3/4" SHAFT   | Ø 3/4" SHAFT<br>-STAINLESS STEEL                   | Ø 1" SHAFT                                | Ø 1" SHAFT<br>-STAINLESS STEEL                     | *MAX. LENGTH OF JACKSHAFT IS 12 FT.                       |
| BEARING         | Ø 3/4" METCAR BEARING<br>-GRADE 1515 COPPER  | SAME AS STS-75                                     | Ø 1" METCAR BEARING<br>-GRADE 1515 COPPER | SAME AS STS-100                                    | ---   |
| CONNECTING ROD  | 3/8" THREADED ROD  | 3/8" THREADED ROD<br>-STAINLESS STEEL              | 1/2" THREADED ROD                         | 1/2" THREADED ROD<br>-STAINLESS STEEL              | ---   |
| ROD END         | 3/8" SPHERICAL ROD END BEARING   | 3/8" SPHERICAL ROD END BEARING<br>-STAINLESS STEEL | 1/2" SPHERICAL ROD END BEARING            | 1/2" SPHERICAL ROD END BEARING<br>-STAINLESS STEEL | ---   |
| BLADE CRANK ARM | Ø 2" COLLAR WELDED TO A<br>2" x 6-1/4" x 1/4" THICK FLAT BAR<br>-STEEL (ZINC PLATED) | SAME AS STS-75                                     | SAME AS STS-75                            | SAME AS STS-75                                     | ---   |
| HAND CRANK      | 10-1/4" x 1/2" THICK<br>-STEEL (ZINC PLATED)   | SAME AS STS-75                                     | SAME AS STS-75                            | SAME AS STS-75                                     | -OPTIONAL<br>-AVAILABLE UPON REQUEST AT ADDITIONAL CHARGE |

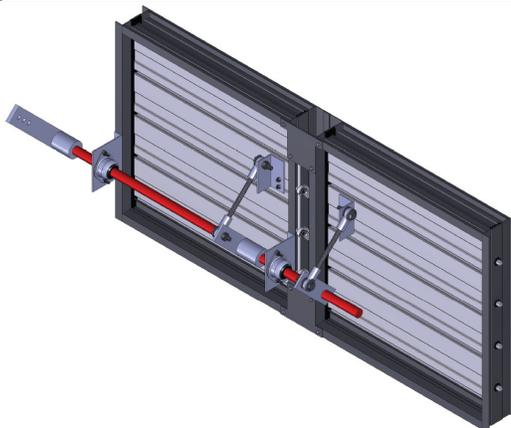

\*Standard construction for dampers made in 2 panels wide (or less) will include **STS-75** (optional **STS-75SS** available)

\*Standard construction for dampers made in 3 panels wide (or more) will include **STS-100** (optional **STS-100SS** available)