


STANDARD CONSTRUCTION	
BLADE STYLE:	2" (51 mm) DEEP STORMPROOF BLADES
CORNER STYLE:	MITRE CORNER
MATERIAL:	EXTRUDED ALUMINUM – 6063-T5 ALLOY
FRAME THICKNESS:	0.062" (1.57 mm)
BLADE THICKNESS:	0.062" (1.57 mm)
BLADE ANGLE:	45°
BLADE CENTRES:	3" (76 mm)
BIRDSCREEN:	19 GA. GALVANIZED BIRDSCREEN - 1/2" x 1/2" OPENINGS
FINISH:	MILL
ROOF INSULATION:	FACTORY APPLIED ANTI-CONDENSATE COATING

SIZE LIMITATIONS		
	MINIMUM	MAXIMUM
THROAT $T_L \times T_W$	12" x 12" (305 x 305 mm)	CONSULT VENTEX
CURB CAP ID $C_L \times C_W$	16" x 16" (406 x 406 mm)	
PENTHOUSE OD $P_L \times P_W$	16.125" x 16.125" (410 x 410 mm)	
HEIGHT	8" (203 mm)	

*PENTHOUSE WILL BE MANUFACTURED EXACT SIZE UNLESS OTHERWISE SPECIFIED
*RECOMMENDED CURB SIZE = CURB CAP ID – 1 1/2" (38 mm)

OPTIONS / ACCESSORIES	
FINISH:	SCREENS:
<ul style="list-style-type: none"> POWDER COAT FINISH DURANAR FINISH ANODIZED FINISH <ul style="list-style-type: none"> CLEAR ANODIZED LIGHT BRONZE MEDIUM BRONZE DARK BRONZE BLACK ANODIZED 	<ul style="list-style-type: none"> BIRDSCREEN <ul style="list-style-type: none"> 1/2" x 1/2" INTER CRIMPED ALUMINUM ALUMINUM BIRDSCREEN WITH FRAME INSECT SCREEN <ul style="list-style-type: none"> 18 x 14 MESH
OTHER:	BLANK-OFF PANELS (ALUMINUM): VARIOUS GAUGES
<ul style="list-style-type: none"> EXTENDED SILLS SECURITY BARS FILTER RACKS STAINLESS STEEL FASTENERS HINGED ROOF HINGED ACCESS DOORS ALL WELDED CONSTRUCTION MONUMENTAL BLADE CONSTRUCTION CONTROL DAMPERS / BACK DRAFT DAMPERS FOR THROAT 	<ul style="list-style-type: none"> NON-INSULATED BLANK-OFF PANELS INSULATED BLANK-OFF PANELS <ul style="list-style-type: none"> 1" (25.4 mm) INSULATION 2" (50.8 mm) INSULATION

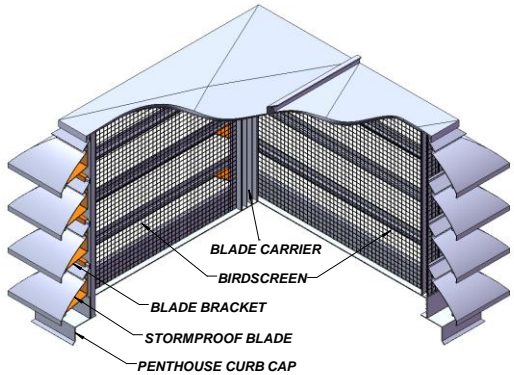

TAG	QTY.	THROAT SIZE $T_L \times T_W$	CURB CAP ID $C_L \times C_W$	PENTHOUSE OD $P_L \times P_W$	HEIGHT	ACCESSORIES
		x	x	x		
		x	x	x		
		x	x	x		
		x	x	x		
		x	x	x		

THROAT SIZE + 4" (102 mm) THROAT SIZE + 4.125" (105 mm)

PROJECT NAME:		ENGINEER:	
CONTRACTOR:		SUBMITTAL DATE:	