





PH2435B

MULLION (BOX) CORNER PENTHOUSE • 4" DEEP • DRAINABLE

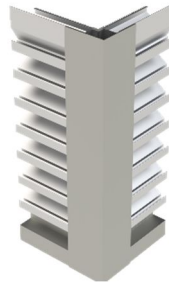

MULLION
CORNER

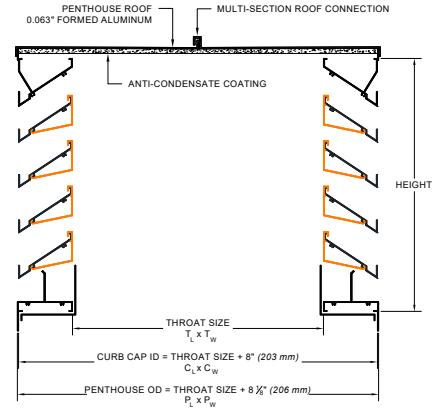

STANDARD CONSTRUCTION

BLADE STYLE:	4" (102 mm) DEEP DRAINABLE BLADES
CORNER STYLE:	MULLION (BOX) CORNER
MATERIAL:	EXTRUDED ALUMINUM – 6063-T5 ALLOY
FRAME THICKNESS:	0.081" (2.06 mm)
BLADE THICKNESS:	0.081" (2.06 mm)
BLADE ANGLE:	35°
BLADE CENTRES:	3.5" (89 mm)
BIRDSCREEN:	19 GA. GALVANIZED BIRDSCREEN - 1/2" x 1/2" OPENINGS
FINISH:	MILL
ROOF INSULATION:	FACTORY APPLIED ANTI-CONDENSATE COATING


SIZE LIMITATIONS

	MINIMUM	MAXIMUM
THROAT T _L x T _W	12" x 12" (305 x 305 mm)	CONSULT VENTEX
CURB CAP ID C _L x C _W	20" x 20" (508 x 508 mm)	
PENTHOUSE OD P _L x P _W	20.125" x 20.125" (511 x 511 mm)	
HEIGHT	12" (305 mm)	

*PENTHOUSE WILL BE MANUFACTURED EXACT SIZE UNLESS OTHERWISE SPECIFIED
*RECOMMENDED CURB SIZE = CURB CAP ID – 1 1/2" (38 mm)

OPTIONS / ACCESSORIES

FINISH: - POWDER COAT FINISH - DURANAR FINISH - ANODIZED FINISH - CLEAR ANODIZED - LIGHT BRONZE - MEDIUM BRONZE - DARK BRONZE - BLACK ANODIZED	SCREENS: - BIRDSCREEN 1/2" x 1/2" INTER CRIMPED ALUMINUM - ALUMINUM BIRDSCREEN WITH FRAME - INSECT SCREEN 18 x 14 MESH
OTHER: - EXTENDED SILLS - SECURITY BARS - FILTER RACKS - STAINLESS STEEL FASTENERS - HINGED ROOF (Single Section) - REMOVABLE ROOF (Multi Section) - HINGED ACCESS DOORS - ALL WELDED CONSTRUCTION - MONUMENTAL BLADE CONSTRUCTION (3mm Blade) - CONTROL DAMPERS / BACK DRAFT DAMPERS FOR THROAT	- AIRFLOW DIVIDERS - INSULATED ROOF - SLOPPED ROOF 3-SIDED CONSTRUCTION - BAFFLE - DRAINPANS - PEAK ROOFS - NO FLANGE ON BOTTOM
BLANK-OFF PANELS (ALUMINUM): VARIOUS GAUGES - NON-INSULATED BLANK-OFF PANELS - INSULATED ROOF - INSULATED BLANK-OFF PANELS 1" (25.4 mm) INSULATION 2" (50.8 mm) INSULATION	

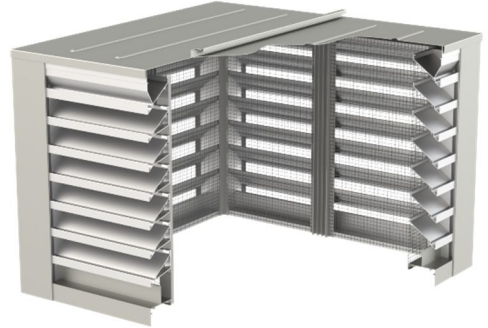

TAG	QTY.	THROAT SIZE T _L x T _W	CURB CAP ID C _L x C _W	PENTHOUSE OD P _L x P _W	HEIGHT	ACCESSORIES

THROAT SIZE + 8" (203 mm) THROAT SIZE + 8.125" (206 mm)

PROJECT NAME:		ENGINEER:	
CONTRACTOR:		SUBMITTAL DATE:	

DWG. PH2435B DECEMBER 2024

CUSTOMIZATIONS AVAILABLE

