

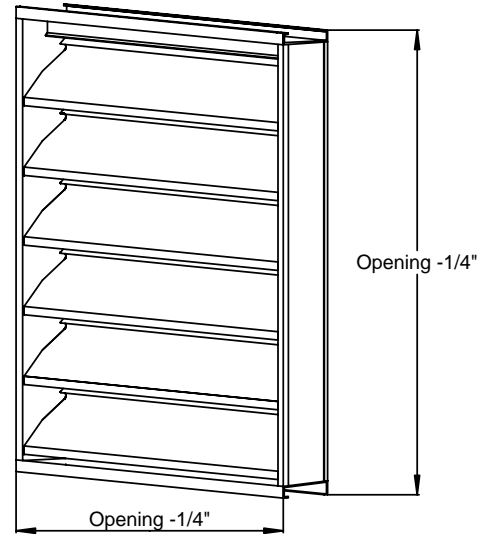





LOUVERS & DAMPERS

**NEW 2620 & 2625 HI-PRO 6 INCH EXTRUDED ALUMINIUM STATIONARY STORMPROOF LOUVER**

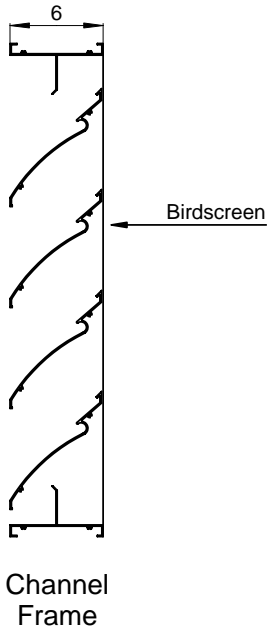

Quantity	Ref. #	Width (W) Opening Size*	Height (H) Opening Size*	Frame	Accessories
<b>PROJECT NAME:</b>					<b>ENGINEER:</b>
<b>CONTRACTOR:</b>					<b>SUBMITTAL DATE:</b>

**STANDARD CONSTRUCTION**

- Depth:** 6 Inches (150 mm)
- Frame Style:** Specify 2620 For Channel Frame  
Specify 2625 For Flange Frame
- Frame Thickness:** 0.085" 6063-T5 Extruded Aluminium
- Blade Thickness:** 0.085" 6063-T5 Extruded Aluminium
- Blade Centres:** 7 1/4 Inches (184 mm)
- Blade Angle:** 45 Degrees
- Minimum Height:** 16 Inches (406 mm)
- Maximum Panel Width:** 72 Inches (1829 mm)
- Maximum Panel Height:** 120 Inches (3048 mm)
- Standard Finish:** Mill
- Standard Birdscreen:** 1/2" x 1/2" Galvanized

**Free Area of 48" x 48" Unit:** 8.06 Sq. ft. (0.743 m<sup>2</sup>)  
Free Area

**Free Area Percentage:** 50 Percent

**AVAILABLE ACCESSORIES**

- Bird Screen:** 1/4 x 1/4 Inter Crimped Aluminium  
1/2 x 1/2 Inter Crimped Aluminium
- Insect Screen:** 18 x 14 Mesh
- Finish:** Mill Finish (Standard)  
Paint Color #: V
- Anodized Finish:** Clear Light Bronze  
Medium Bronze Dark Bronze
- Accessories:** Aluminium Blank Off Panel  
1" or 2" Insulated Blank Off Panel  
Hinged Frame  
Assembled with Stainless Steel Fasteners  
Hinged Frame and Louvered Access Door  
Security Bars  
Extended Sills  
Extended Sleeves  
Filter Racks  
Custom Geometric Shapes




**Models: 2620 & 2625**

6" Extruded Aluminium Stormproof Louver  
Free Area in Square Feet


		WIDTH IN INCHES														
		16	20	24	28	32	36	40	44	48	52	56	60	64	68	72
16		0.50	0.65	0.79	0.93	1.07	1.21	1.36	1.50	1.64	1.78	1.92	2.06	2.21	2.35	2.49
20		0.79	1.02	1.24	1.46	1.69	1.91	2.13	2.36	2.58	2.80	3.03	3.25	3.47	3.69	3.92
24		1.03	1.31	1.60	1.89	2.18	2.46	2.75	3.04	3.33	3.62	3.90	4.19	4.48	4.77	5.05
28		1.31	1.68	2.05	2.42	2.79	3.16	3.53	3.90	4.27	4.63	5.00	5.37	5.74	6.11	6.48
32		1.44	1.85	2.25	2.66	3.07	3.47	3.88	4.28	4.69	5.09	5.50	5.90	6.31	6.71	7.12
36		1.60	2.04	2.49	2.94	3.39	3.84	4.28	4.73	5.18	5.63	6.07	6.52	6.97	7.42	7.87
40		1.96	2.51	3.06	3.61	4.16	4.70	5.25	5.80	6.35	6.90	7.45	8.00	8.55	9.10	9.65
44		2.12	2.72	3.32	3.91	4.51	5.10	5.70	6.30	6.89	7.49	8.08	8.68	9.28	9.87	10.47
H 48		2.48	3.18	3.88	4.57	5.27	5.97	6.67	7.36	8.06	8.76	9.45	10.15	10.85	11.54	12.24
E 52		2.70	3.46	4.21	4.97	5.73	6.49	7.24	8.00	8.76	9.52	10.27	11.03	11.79	12.55	13.30
I 56		3.00	3.84	4.68	5.52	6.36	7.20	8.04	8.88	9.73	10.57	11.41	12.25	13.09	13.93	14.77
G 60		3.23	4.14	5.05	5.96	6.87	7.77	8.68	9.59	10.50	11.41	12.31	13.22	14.13	15.04	15.95
H 64		3.52	4.50	5.49	6.48	7.46	8.45	9.44	10.42	11.41	12.40	13.39	14.37	15.36	16.35	17.33
I 68		3.77	4.83	5.89	6.95	8.00	9.06	10.12	11.18	12.24	13.30	14.35	15.41	16.47	17.53	18.59
G 72		3.91	5.01	6.11	7.20	8.30	9.40	10.50	11.59	12.69	13.79	14.89	15.98	17.08	18.18	19.28
H 76		4.17	5.33	6.50	7.67	8.84	10.01	11.18	12.35	13.52	14.69	15.86	17.03	18.20	19.37	20.53
H 80		4.45	5.69	6.94	8.19	9.44	10.69	11.93	13.18	14.43	15.68	16.93	18.17	19.42	20.67	21.92
T 84		4.68	5.99	7.31	8.62	9.93	11.25	12.56	13.87	15.19	16.50	17.81	19.13	20.44	21.75	23.07
H 88		4.98	6.38	7.78	9.18	10.58	11.97	13.37	14.77	16.17	17.57	18.97	20.37	21.76	23.16	24.56
E 92		5.20	6.66	8.12	9.58	11.03	12.49	13.95	15.41	16.87	18.33	19.79	21.25	22.71	24.17	25.63
I 96		5.52	7.07	8.62	10.16	11.71	13.26	14.81	16.36	17.91	19.46	21.01	22.56	24.10	25.65	27.20
G 100		5.72	7.32	8.93	10.53	12.14	13.74	15.35	16.95	18.56	20.16	21.77	23.37	24.98	26.58	28.19
H 104		5.84	7.48	9.12	10.76	12.39	14.03	15.67	17.31	18.95	20.59	22.23	23.87	25.51	27.14	28.78
I 108		6.24	7.99	9.74	11.49	13.24	14.99	16.74	18.49	20.24	21.99	23.75	25.50	27.25	29.00	30.75
G 112		6.36	8.15	9.93	11.72	13.50	15.29	17.07	18.86	20.65	22.43	24.22	26.00	27.79	29.57	31.36
H 116		6.73	8.62	10.51	12.40	14.29	16.17	18.06	19.95	21.84	23.73	25.62	27.51	29.40	31.29	33.18
T 120		6.88	8.81	10.74	12.67	14.61	16.54	18.47	20.40	22.33	24.26	26.19	28.13	30.06	31.99	33.92

**2620 Stormproof Water Penetration**

15 Minute Duration, Test Size (48x48)

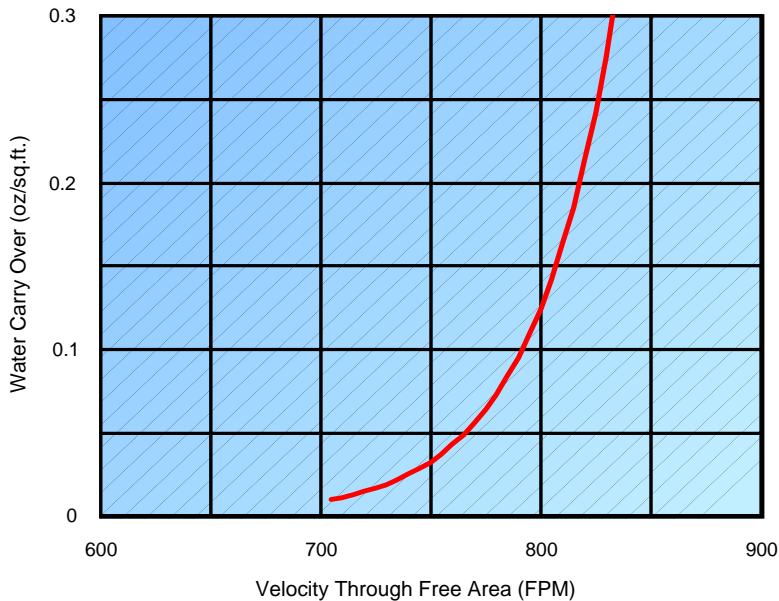

**Pressure Drop - Intake**

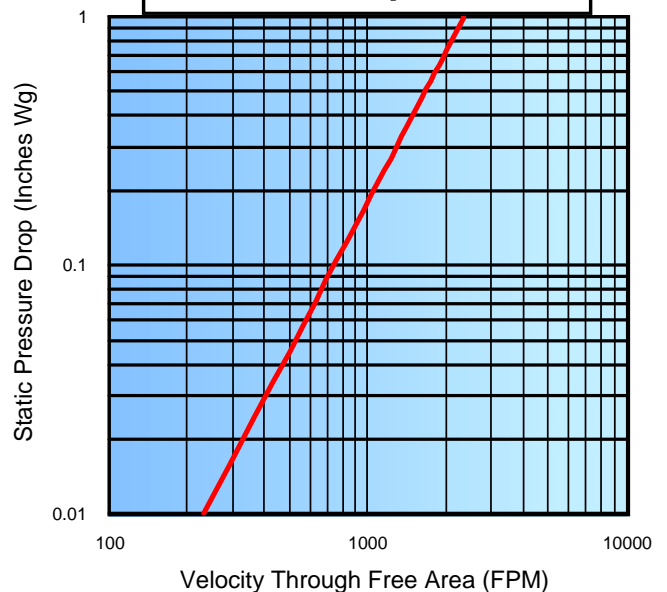

Test results do not include the effect of birdscreen



**Certified Ratings**

Ventex certifies that the Models 2630/2635 shown here are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Standard 511 and comply with the requirements of the AMCA Certified Ratings Program. The Certified Ratings Seal applies to air performance and water penetration ratings.

**Recommended Specification**

Furnish and install stationary louver models 2630 / 2635 as manufactured by Ventex, Bolton Ontario. Louvers shall be 6 inches (150 mm) deep. Blades shall be 0.081 Inches (2.06 mm), frame shall be 0.081 (2.06 mm) extruded aluminium, alloy 6063-T5. Louvers shall have a 19 gauge galvanized 1/2 x 1/2 birdscreen. All materials shall be factory finished after assembly with Polyester Baking Enamel in a color selected from the Ventex Color Chart.