



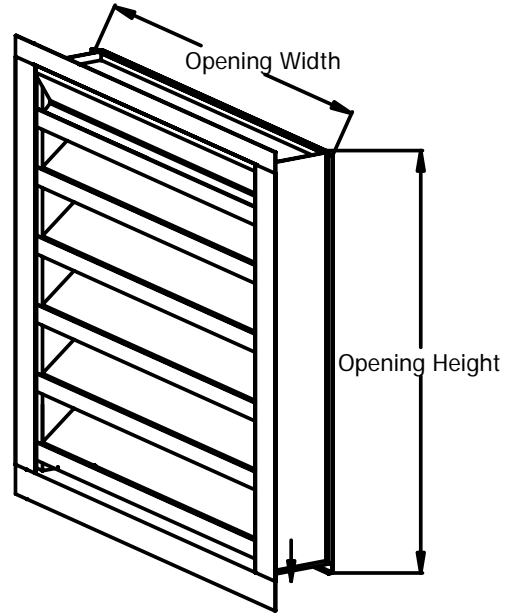

LOUVERS & DAMPERS

2670-CLD HI PRO 6 INCH EXTRUDED ALUMINIUM DRAINABLE STATIONARY LOUVER

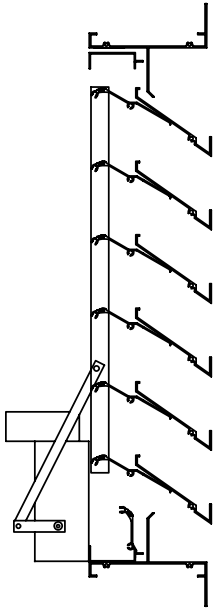

Quantity	Ref. #	Width (W)*	Height (H)*	Frame	Accessories
PROJECT NAME:					ENGINEER:
CONTRACTOR:					SUBMITTAL DATE:

STANDARD CONSTRUCTION

Depth: 6 Inches (152 mm)
Frame Style: Channel Frame (2670-CLD) or Flange Frame (2675-CLD)
Frame Thickness: 0.081" 6063-T5 Extruded Aluminium
Blade Thickness: 0.081" 6063-T5 Extruded Aluminium
Blade Centres: 3 3/4 Inches (96 mm)
Blade Angle: 35 Degrees
Minimum Height: 12 Inches (300 mm)
Maximum Panel Width: 60 Inches (1524 mm)
Maximum Panel Height: 60 Inches (1524 mm)
Free Area of 48" x 48" Unit: 8.00 Sq.ft.
Standard Operation Method: Motor Multi Products, 2 Position, External Spring Return. UL & CSA Approved
Standard Seals: Vinyl Blade Seal.

AVAILABLE ACCESSORIES

Bird Screen: 1/2 x 1/2 Galvanized (Standard)
 1/2 x 1/2 Aluminium
Insect Screen: 18 x 14 Mesh
Finish: Mill Finish (Standard)
 Paint Color #: V

Accessories:

- Extended Sill
- Multi-Products Motor Packs (115 volt, 230 volt (single phase), 460 volt (single phase), & 24 volt AC)
- Belimo or Honeywell Motors available upon request.
- End switch
- Continuous Line construction is NOT AVAILABLE.

* Louver will be manufactured 1/4" smaller than given opening dimensions, unless otherwise specified.