


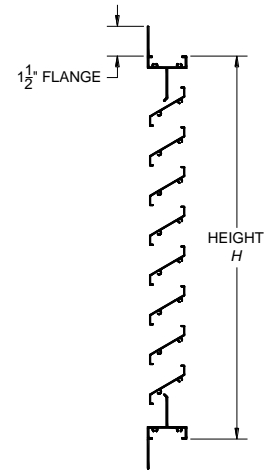


**MODEL: 2210**  
**FRAME: CHANNEL FRAME**  
**DUCT-MOUNT (DM)**

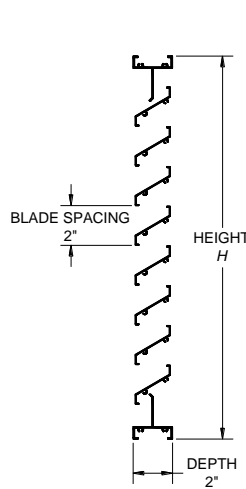

**MODEL: 2215**  
**FRAME: FLANGE FRAME**  
**FLANGE-MOUNT (FM)**



PERFORMANCE			
LOUVER UNIT SIZE	TOTAL AREA	FREE AREA	FREE AREA
48" x 48"	16 ft <sup>2</sup>	8.51 ft <sup>2</sup>	<b>53.2%</b>
(1219 x 1219 mm)	(1.49 m <sup>2</sup> )	(0.79 m <sup>2</sup> )	
BEGINNING POINT OF WATER PENETRATION AT 0.01 oz./ft <sup>2</sup> FREE AREA (15 MINUTE DURATION)			<b>478 FPM</b>

STANDARD CONSTRUCTION	
DEPTH:	2" (51 mm)
MATERIAL:	EXTRUDED ALUMINUM - 6063-T5 ALLOY
FRAME THICKNESS:	0.062" (1.57 mm)
BLADE THICKNESS:	0.062" (1.57 mm)
BLADE ANGLE:	30°
BLADE CENTRES:	2" (51 mm)
BIRDSCREEN:	19 GA. GALVANIZED BIRDSCREEN - 1/2" x 1/2" OPENINGS
FINISH:	MILL

SIZE LIMITATIONS: SINGLE SECTION LOUVER		
	MINIMUM	MAXIMUM
WIDTH	12" (305 mm)	72" (1829 mm)
HEIGHT	8" (203 mm)	72" (1829 mm)
AREA	0.67 ft <sup>2</sup> (0.06 m <sup>2</sup> )	36 ft <sup>2</sup> (3.34 m <sup>2</sup> )

\*LOUVER WILL BE MANUFACTURED 1/4" (6.4 mm) SMALLER (SINGLE SECTION) AND 1/2" (12.7 mm) SMALLER (MULTIPLE SECTION) THAN GIVEN OPENING DIMENSIONS UNLESS OTHERWISE SPECIFIED.

AVAILABLE ACCESSORIES		
<b>FINISH:</b> <ul style="list-style-type: none"> <li>POLYESTER POWDER COAT</li> <li>DURANAR FINISH</li> <li>ANODIZED FINISH                             <ul style="list-style-type: none"> <li>CLEAR ANODIZED</li> <li>LIGHT BRONZE</li> <li>MEDIUM BRONZE</li> <li>DARK BRONZE</li> <li>BLACK ANODIZED</li> </ul> </li> <li>EXTENDED SILLS</li> <li>SECURITY BARS</li> <li>FILTER RACKS</li> <li>STAINLESS STEEL FASTENERS</li> <li>HINGED ACCESS DOORS</li> <li>ALL WELDED CONSTRUCTION</li> <li>CUSTOM GEOMETRIC SHAPES</li> <li>CONTINUOUS LINE CONSTRUCTION WITH HIDDEN MULLIONS TO PROVIDE AN UNINTERRUPTED APPEARANCE</li> </ul>	<b>SCREENS:</b> <ul style="list-style-type: none"> <li>BIRDSCREEN                             <ul style="list-style-type: none"> <li>1/2" x 1/2" INTER CRIMPED ALUMINUM</li> <li>ALUMINUM BIRDSCREEN WITH FRAME</li> </ul> </li> <li>INSECT SCREEN                             <ul style="list-style-type: none"> <li>18 x 14 MESH</li> </ul> </li> </ul>	<b>BLANK-OFF PANELS (ALUMINUM):</b> VARIOUS GAUGES <ul style="list-style-type: none"> <li>NON-INSULATED BLANK-OFF PANELS</li> <li>INSULATED BLANK-OFF PANELS                             <ul style="list-style-type: none"> <li>1" (25.4 mm) INSULATION</li> <li>2" (50.8 mm) INSULATION</li> </ul> </li> </ul>

**FREE AREA (Sq. Ft.)**


HEIGHT (INCHES)	WIDTH (INCHES)															
	12	16	20	24	28	32	36	40	44	48	52	56	60	64	68	72
8	0.17	0.23	0.29	0.36	0.42	0.48	0.54	0.61	0.67	0.73	0.79	0.86	0.92	0.98	1.05	1.11
12	0.35	0.48	0.61	0.73	0.86	0.99	1.12	1.25	1.38	1.51	1.64	1.77	1.90	2.03	2.16	2.29
16	0.53	0.72	0.92	1.11	1.31	1.50	1.70	1.90	2.09	2.29	2.48	2.68	2.88	3.07	3.27	3.46
20	0.70	0.97	1.23	1.49	1.75	2.02	2.28	2.54	2.80	3.07	3.33	3.59	3.85	4.11	4.38	4.64
24	0.88	1.21	1.54	1.87	2.20	2.53	2.86	3.19	3.51	3.84	4.17	4.50	4.83	5.16	5.49	5.82
28	1.06	1.46	1.85	2.25	2.64	3.04	3.44	3.83	4.23	4.62	5.02	5.41	5.81	6.20	6.60	6.99
32	1.24	1.70	2.17	2.63	3.09	3.55	4.01	4.48	4.94	5.40	5.86	6.32	6.79	7.25	7.71	8.17
36	1.42	1.95	2.48	3.01	3.53	4.06	4.59	5.12	5.65	6.18	6.71	7.23	7.76	8.29	8.82	9.35
40	1.60	2.19	2.79	3.38	3.98	4.57	5.17	5.76	6.36	6.96	7.55	8.15	8.74	9.34	9.93	10.53
44	1.78	2.44	3.10	3.76	4.42	5.09	5.75	6.41	7.07	7.73	8.39	9.06	9.72	10.38	11.04	11.70
48	1.96	2.69	3.41	4.14	4.87	5.60	6.33	7.05	7.78	8.51	9.24	9.97	10.70	11.42	12.15	12.88
52	2.14	2.93	3.73	4.52	5.31	6.11	6.90	7.70	8.49	9.29	10.08	10.88	11.67	12.47	13.26	14.06
56	2.31	3.18	4.04	4.90	5.76	6.62	7.48	8.34	9.21	10.07	10.93	11.79	12.65	13.51	14.37	15.23
60	2.49	3.42	4.35	5.28	6.21	7.13	8.06	8.99	9.92	10.84	11.77	12.70	13.63	14.56	15.48	16.41
64	2.67	3.67	4.66	5.66	6.65	7.64	8.64	9.63	10.63	11.62	12.62	13.61	14.61	15.60	16.59	17.59
68	2.85	3.91	4.97	6.03	7.10	8.16	9.22	10.28	11.34	12.40	13.46	14.52	15.58	16.64	17.70	18.77
72	3.03	4.16	5.29	6.41	7.54	8.67	9.80	10.92	12.05	13.18	14.31	15.43	16.56	17.69	18.82	19.94

**FREE AREA (%)**

HEIGHT (INCHES)	WIDTH (INCHES)															
	12	16	20	24	28	32	36	40	44	48	52	56	60	64	68	72
8	25.3%	26.0%	26.4%	26.7%	26.9%	27.1%	27.2%	27.3%	27.4%	27.5%	27.5%	27.6%	27.6%	27.6%	27.7%	27.7%
12	34.7%	35.7%	36.3%	36.7%	37.0%	37.2%	37.4%	37.5%	37.7%	37.7%	37.8%	37.9%	38.0%	38.0%	38.0%	38.1%
16	39.5%	40.6%	41.3%	41.7%	42.1%	42.3%	42.5%	42.7%	42.8%	42.9%	43.0%	43.1%	43.1%	43.2%	43.2%	43.3%
20	42.3%	43.5%	44.3%	44.8%	45.1%	45.4%	45.6%	45.7%	45.9%	46.0%	46.1%	46.2%	46.2%	46.3%	46.3%	46.4%
24	44.2%	45.5%	46.2%	46.8%	47.1%	47.4%	47.6%	47.8%	47.9%	48.0%	48.1%	48.2%	48.3%	48.4%	48.4%	48.5%
28	45.5%	46.9%	47.7%	48.2%	48.6%	48.9%	49.1%	49.3%	49.4%	49.5%	49.6%	49.7%	49.8%	49.8%	49.9%	50.0%
32	46.6%	47.9%	48.7%	49.3%	49.7%	49.9%	50.2%	50.3%	50.5%	50.6%	50.7%	50.8%	50.9%	51.0%	51.0%	51.1%
36	47.3%	48.7%	49.5%	50.1%	50.5%	50.8%	51.0%	51.2%	51.4%	51.5%	51.6%	51.7%	51.8%	51.8%	51.9%	51.9%
40	48.0%	49.4%	50.2%	50.8%	51.2%	51.5%	51.7%	51.9%	52.0%	52.2%	52.3%	52.4%	52.4%	52.5%	52.6%	52.6%
44	48.5%	49.9%	50.8%	51.3%	51.7%	52.0%	52.3%	52.4%	52.6%	52.7%	52.8%	52.9%	53.0%	53.1%	53.1%	53.2%
48	48.9%	50.3%	51.2%	51.8%	52.2%	52.5%	52.7%	52.9%	53.1%	53.2%	53.3%	53.4%	53.5%	53.5%	53.6%	53.7%
52	49.3%	50.7%	51.6%	52.2%	52.6%	52.9%	53.1%	53.3%	53.5%	53.6%	53.7%	53.8%	53.9%	53.9%	54.0%	54.1%
56	49.6%	51.0%	51.9%	52.5%	52.9%	53.2%	53.4%	53.6%	53.8%	53.9%	54.0%	54.1%	54.2%	54.3%	54.4%	54.4%
60	49.9%	51.3%	52.2%	52.8%	53.2%	53.5%	53.7%	53.9%	54.1%	54.2%	54.3%	54.4%	54.5%	54.6%	54.6%	54.7%
64	50.1%	51.6%	52.4%	53.0%	53.4%	53.8%	54.0%	54.2%	54.3%	54.5%	54.6%	54.7%	54.8%	54.8%	54.9%	55.0%
68	50.3%	51.8%	52.7%	53.2%	53.7%	54.0%	54.2%	54.4%	54.6%	54.7%	54.8%	54.9%	55.0%	55.1%	55.1%	55.2%
72	50.5%	52.0%	52.9%	53.4%	53.9%	54.2%	54.4%	54.6%	54.8%	54.9%	55.0%	55.1%	55.2%	55.3%	55.3%	55.4%

**PRESSURE DROP- 2210 / 2215**

FIGURE 5.5, TEST SIZE 48" x 48"

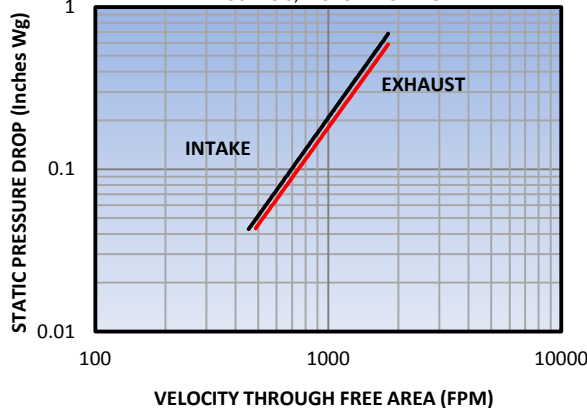

TEST RESULTS DO NOT INCLUDE THE EFFECTS OF BIRDSCREEN.  
DATA CORRECTED TO STANDARD AIR DENSITY @ 0.075 LBS/FT<sup>3</sup>.

**RECOMMENDED SPECIFICATION**

Furnish and install stationary louver model 2210 / 2215 as manufactured by Ventex Inc, Bolton, Ontario. Louvers must be licensed to bear the AMCA seal. Louvers shall be 2" (51 mm) deep. Blades shall be 0.062" (1.57 mm) extruded 6063-T5 aluminum alloy and frame shall be 0.062" (1.57 mm) extruded 6063-T5 aluminum alloy. Louvers shall have 19 gauge galvanized 1/2" x 1/2" birdscreen. All materials shall be factory finished after assembly with Polyester Powder Coat in a color selected from the Ventex Color Chart.

**CERTIFIED RATINGS**

Ventex Inc. certifies that the models 2210 / 2215 shown here are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings seal applies to Water Penetration and Air Performance ratings.

